


# MK15PP

## Plastic pump



Performance curve

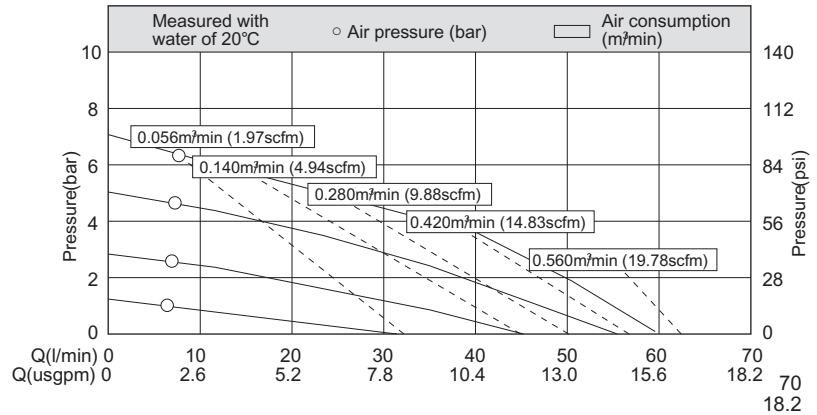

Technical parameters		
Suction lift[mwc]	dry	4
	wet	7.6
Max particle diameter[mm]		2.5
Suction and discharge size[in]	1/2	3/4
Air inlet size[in]		3/8
Max flow[l/min]		57
Max head[m]		84
Max air inlet pressure[bar]		8.4

material quality	
Pumpbody:	PP, PVDF, POM
Diaphragm:	Santoprene, Hytel, Teflon, Viton, EPDM, Buna-N
Valve ball:	Teflon, Stainless steel, Santoprene
Valve seat:	PP, PVDF, POM
Center block:	PP
Weight	
PP pump / POM pump:	3.5 Kgs
PVDF pump:	4.5 Kgs

### Installation size

