



MK25PP

Plastic pump

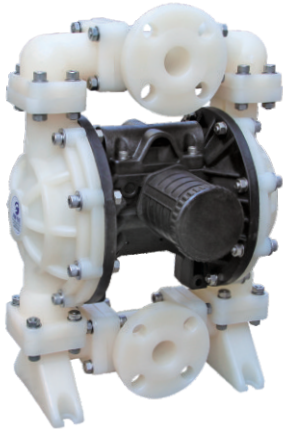

Performance curve

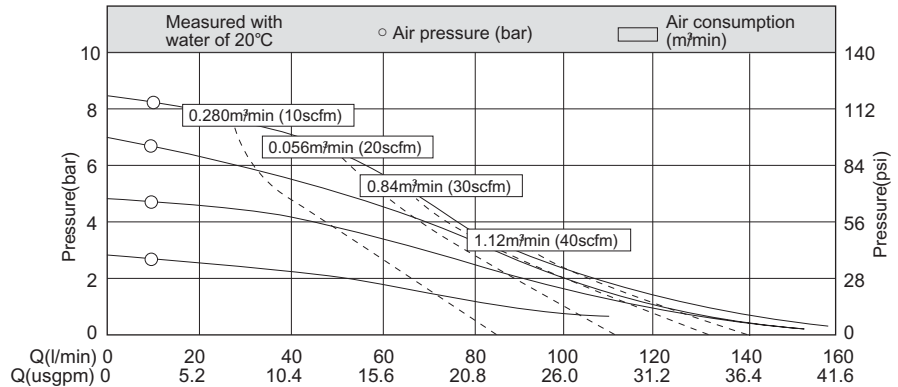

Technical parameters			
Suction lift[mwc]	dry		4
	wet		8
Max particle diameter[mm]			4
Suction and discharge size[in]			1
Air inlet size[in]			1/2
Max flow[l/min]			157
Max head[m]			84
Max air inlet pressure[bar]			8.4

material quality	
Pumpbody:	PP, PVDF, POM
Diaphragm:	Santoprene, Hytrel, Teflon, Viton, EPDM, Buna-N
Valve ball:	Teflon, Stainless steel, Santoprene, Hytrel, Viton, Ceramic
Valve seat:	Teflon, Santoprene, Hytrel, Viton, PP
Center block:	PP, Aluminum, Stainless steel
Weight	
PP pump / POM pump:	9 Kgs
PVDF pump:	12 Kgs

Installation size

