


MK50PP

Plastic pump



Performance curve

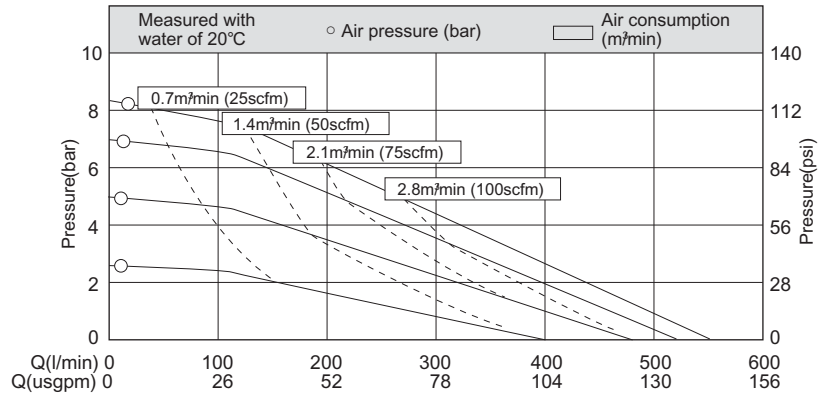

Technical parameters

Suction lift[mwc]	dry	5
	wet	8
Max particle diameter[mm]		6
Suction and discharge size[in]		2
Air inlet size[in]		1/2
Max flow[l/min]		587
Max head[m]		84
Max air inlet pressure[bar]		8.4

material quality

Pumpbody: PP, PVDF

Diaphragm: Santoprene, Hytel, Teflon, Viton, EPDM, Buna-N

Valve ball: Teflon, Stainless steel, Santoprene, Hytel, Viton, Ceramic

Valve seat: Teflon, Santoprene, Hytel, Viton, PP

Center block: PP, Aluminum, Stainless steel

Weight

PP pump: 25 Kgs

PVDF pump: 34 Kgs

Installation size

