



BlueTruckMaster®

PORTABLE AdBlue STORAGE AND DISPENSING



The Kingspan Titan BlueTruckMaster range has been specifically designed for the safe transportation of AdBlue. This robust, portable solution offers users the ultimate convenience by allowing them to refill remotely on-site.

Available from 200 to 900 litres. The BlueTruckMaster is built from high quality polyethylene providing resistance to structural damage, changing weather conditions and UV radiation whilst offering a number of equipment options to suit all types of user.

Quality Design and Reliability

Offering a robust and resilient product design combined with a 5 year guarantee*, quality customer service and over 40 years' experience delivering high performing products worldwide - you know you can trust Kingspan.



Excellent Return On Investment

Lightweight, portable storage solution offering a faster and safer delivery of AdBlue to any point of use and model options which occupy only half a euro pallet - saving you valuable time and money.



Portability & Design Features

The BlueTruckMaster has been designed to go anywhere and to withstand the toughest of site conditions offering liquid delivery a new mobility. Additionally, the unique internal baffle wall minimises spillage when in transit - protecting AdBlue and the environment.



* With 1 year on equipment



SPECIFICATION SELECTOR

| DESCRIPTION / CAPACITY | BTM200 NEW SHAPE | BTM300 NEW SHAPE | BTM200 | BTM430 | BTM900 |
|--|---------------------|---------------------|--------|--------|--------|
| Ball valve on suction line | | | | | ● |
| Suction line with mesh filter | ● | ● | ● | ● | ● |
| 12 V DC pump (max. flow rate 50 l/min) | ● | ● | ● | ● | ● |
| 6 m power cable with battery clamps | ● | ● | ● | ● | ● |
| 4 m flexible delivery hose | ● | ● | ● | ● | ● |
| Automatic nozzle | ● | ● | ● | ● | ● |
| Lid with integrated lock | | | ● | ● | ● |
| Lid with separate lock (lock not provided) | ● | ● | | | |
| Vacuum and pressure relief valve (VENT) | ● | ● | ● | ● | ● |
| Lid with support gas struts | | | | | ● |
| 4 lifting shackles | | | ○ | ○ | ○ |
| Battery powered LED lamp | | | ○ | ○ | ○ |
| 24 V DC pump (max. flow rate 50 l/min) | ○ | ○ | ○ | ○ | ○ |
| 230 V AC pump (max. flow rate 56 l/min) | | | ○ | ○ | ○ |
| Digital flowmeter fixed to the nozzle | ○ | ○ | ○ | ○ | ○ |

● Standard accessories. ○ Optional accessories.

NEW BTM 200



Capacity 200 Litres
Length 600 mm
Width 800 mm
Height 620 mm

BTM 200



Capacity 200 Litres
Length 1180 mm
Width 860 mm
Height 500 mm

NEW BTM 300



Capacity 300 Litres
Length 600 mm
Width 800 mm
Height 890 mm

BTM 430




Capacity 430 Litres
Length 1180 mm
Width 860 mm
Height 910 mm


BTM 900



Capacity 900 Litres
Length 1410 mm
Width 1050 mm
Height 1210 mm

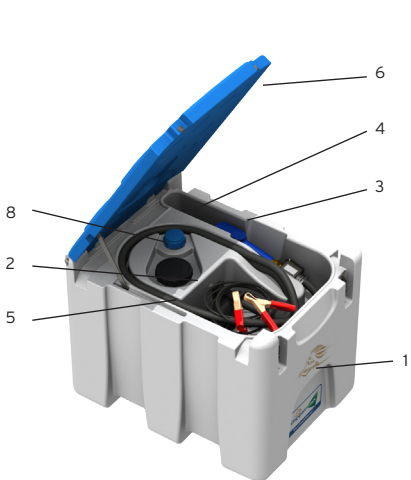

BlueTruckMaster 200 L

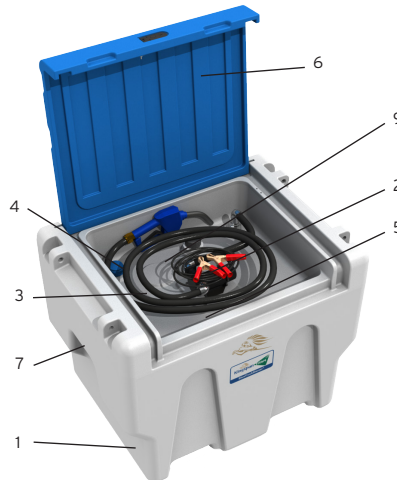

BlueTruckMaster 430 L

Equipment specification:

1. Tank
2. Pump
3. Automatic nozzle
4. Vent
5. Delivery hose
6. Lockable lid*
7. Shackles**
8. 4" Inspection lid**
9. Filling offset**

* Lid with integrated lock (BTM200, BTM430 and BTM900) BTM200 & BTM300 can be locked with the padlock (padlock not provided)
 ** Only available on certain models.