

# Mod:SS304-800-EX


All stainless steel with explosion-proof motor



Rated Voltage :	220V
Rated input Power :	880W
No-load Speed :	12000r/min
Hydraulics lift :	6m
Delivery capacity :	130L/min
Import OD :	50mm
Exit diameter :	32mm
Viscosity range:	Max 500 CPS

## Explosion-proof area:

Not all of the SB series drum pump can be used in hazardous areas, transport flammable and explosive fluids only explosion-proof motor with stainless steel tubes can be used in hazardous areas, at the same time need to install anti-static device (Figure 1).

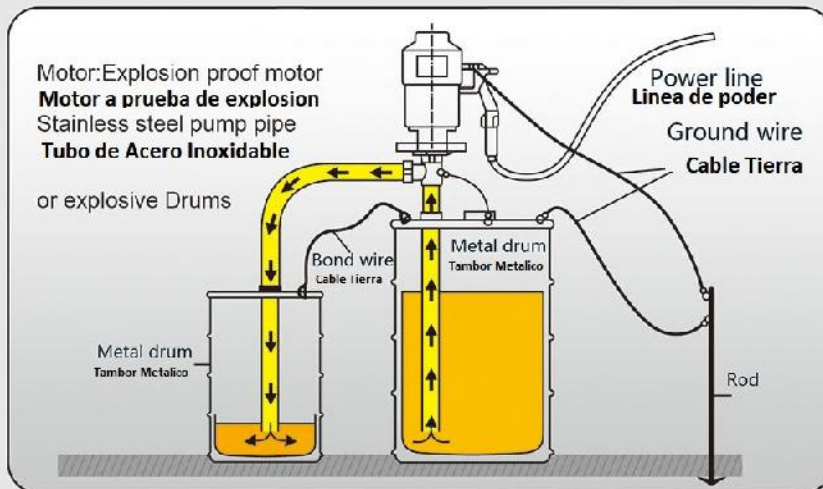

Can transport gasoline, alcohol and other flammable low viscosity liquid

When transporting flammable and explosive medium, owing please install electrostatic protection device, Use explosion-proof electrical outlet, Antistatic discharge pipe.



Note: In order to reduce the risk of static build-up, Suggested that a continuous working shall not exceed 10 minutes.

