



# MK40 Plastic pump

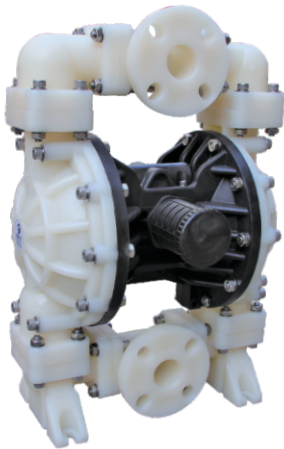

Performance curve

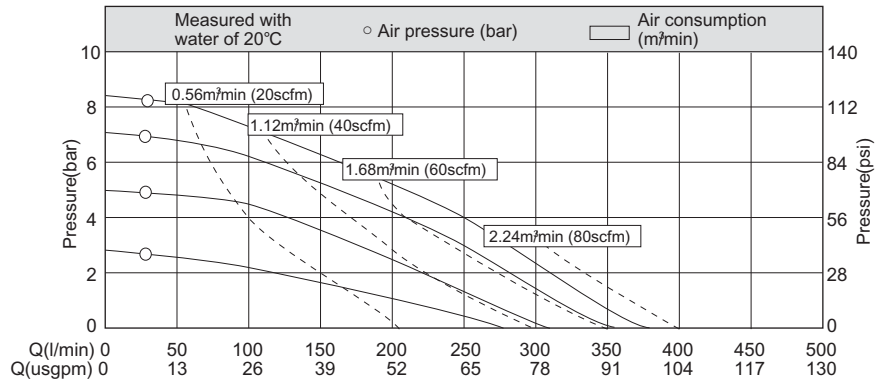

### Technical parameters

Suction lift[mwc]	dry	5
	wet	8
Max particle diameter[mm]		5
Suction and discharge size[in]		1 1/2
Air inlet size[in]		1/2
Max flow[l/min]		358
Max head[m]		84
Max air inlet pressure[bar]		8.4

### material quality

- Pumpbody: PP, PVDF
- Diaphragm: Santoprene, Hytel, Teflon, Viton, EPDM, Buna-N
- Valve ball: Teflon, Stainless steel, Santoprene, Hytel, Viton, Ceramic
- Valve seat: Teflon, Santoprene, Hytel, Viton, PP
- Center block: PP, Aluminum, Stainless steel

### Weight

- PP pump: 17 Kgs
- PVDF pump: 24 Kgs

### Installation size

